

product specification

产品规格书

Project No.	CTW- <u>1125-A8KL27-30V</u> .D
项目编号	
Customer	
客户名称	
Module No.	
客户型号	
Product type	StandardLCM
产品内容	800*1280 8.0”TFT LCD

Customer Approval	
Project Manager	
Director of Quality	
Purchasing Engineer	


Document revision history :

[illegible]

1. General Feature:

Item	Standard Value	Unit
Display Size	8.0'	--
Number of Pixels	800(H)x3(RGB)x1280(V)	--
Active Area	107.64(H)*172.224(V)	mm
Pixel pitch	0.04485(H) × 0.13455(V)	mm
Outline Dimension	114.6(H) × 184.104(V) × 2.6(T)	mm
Pixel Arrangement	RGB vertical stripe	-
Display Mode	Normally Black	-
Number of color	16.7M	-
Viewing Direction	ALL Viewing direction	-
Surface Treatment	Anti-Glare	-
LCD type		-
Interface	MIPI	-
Driver IC	TBD	-
Driver Condition		V
Backlight	White LED	-
Touch Panel	No Touch Panel	-
Operation Temperature	-20~60	°C
Storage Temperature	-25~70	°C
Weight	TBD	g

2.Mechanical Dimension

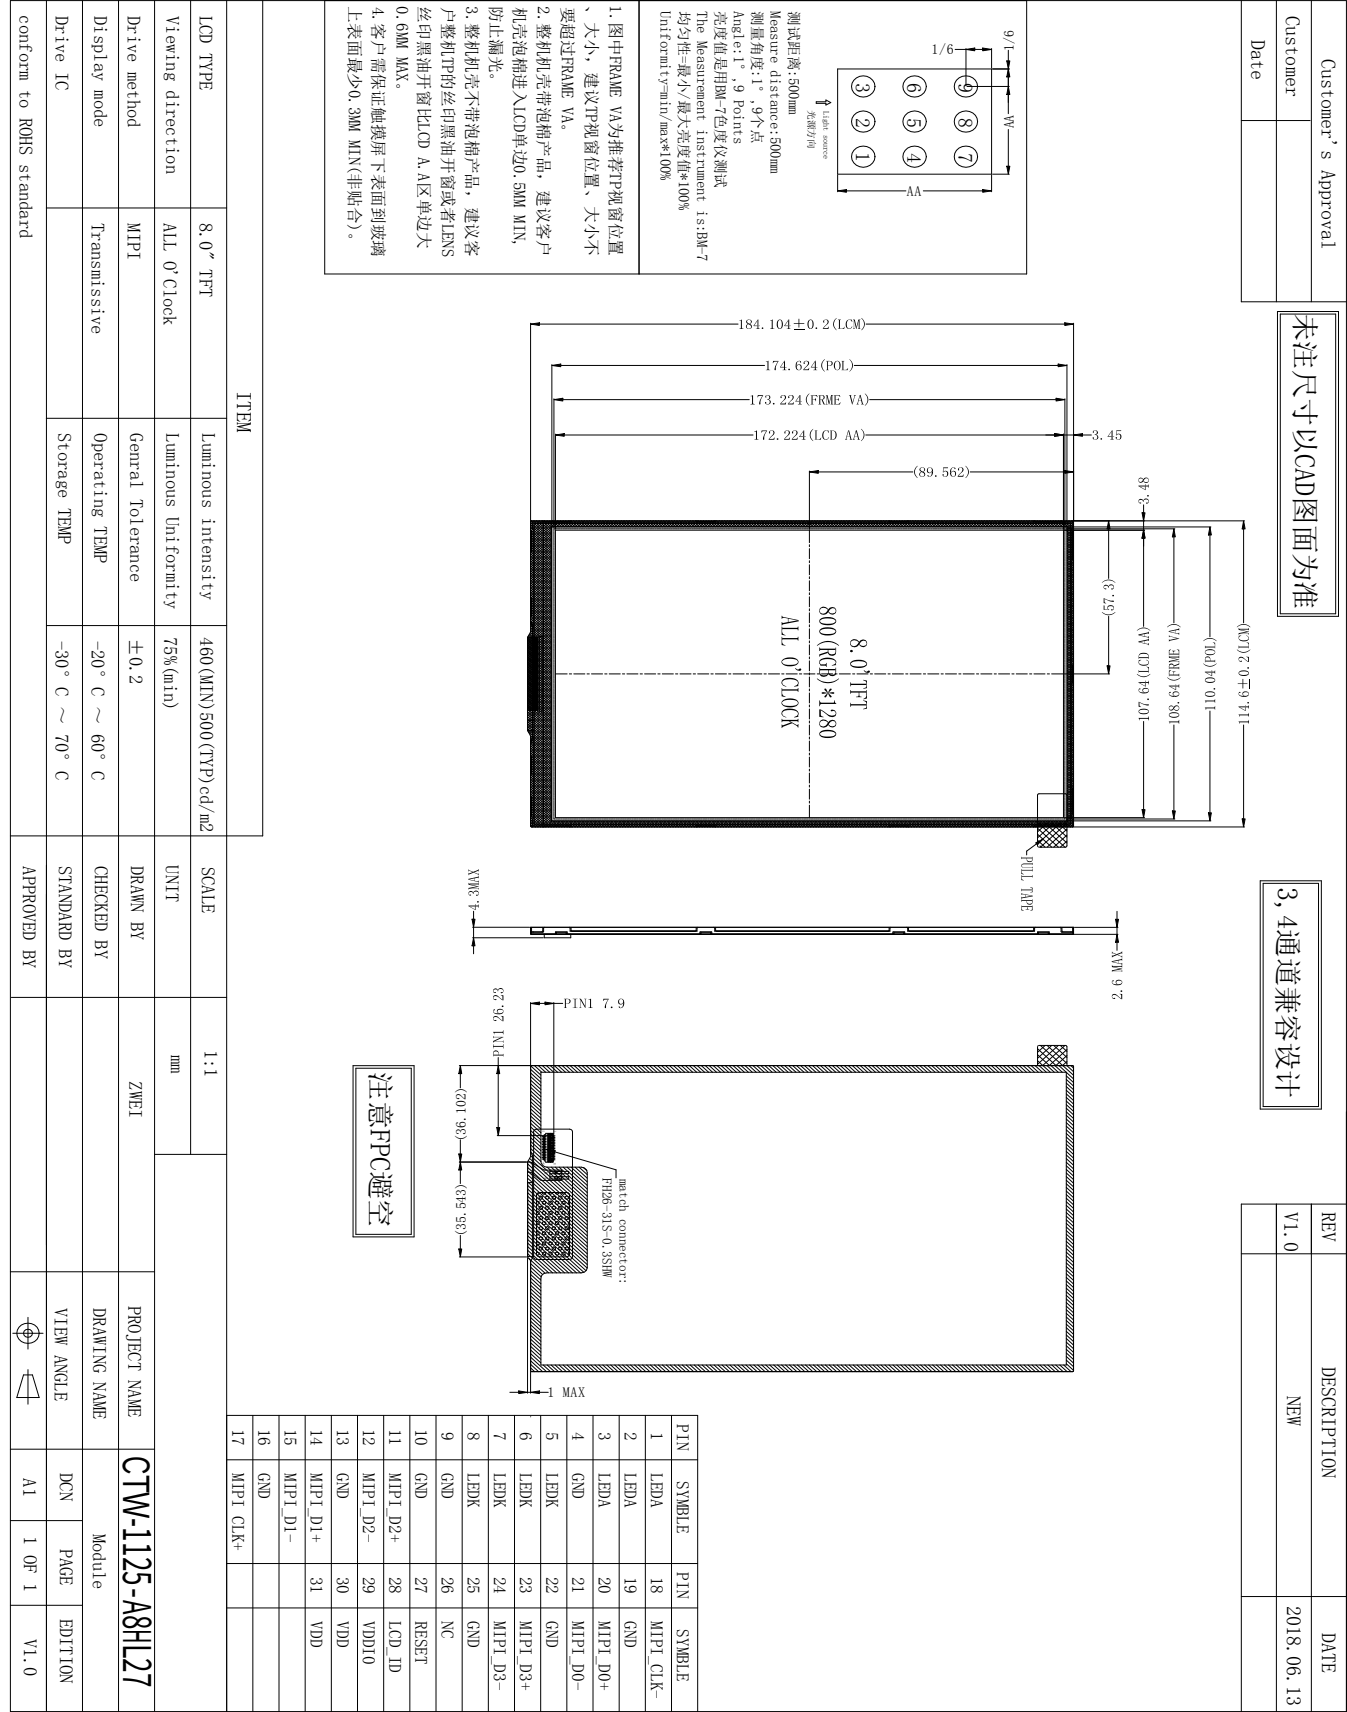

3.Pin Description

Pin NO.	Symbol	Description
1	LEDA	LED Anode
2	LEDA	LED Anode
3	LEDA	LED Anode
4	NC	OPEN
5	LEDK	LED Cathode
6	LEDK	LED Cathode
7	LEDK	LED Cathode
8	LEDK	LED Cathode
9	GND	Ground
10	GND	Ground
11	D2P	MIPI data input.
12	D2N	MIPI data input.
13	GND	Ground
14	D1P	MIPI data input.
15	D1N	MIPI data input.
16	GND	Ground
17	CLKP	MIPI data input.
18	CLKN	MIPI data input.
19	GND	Ground
20	D0P	MIPI data input.
21	D0N	MIPI data input.
22	GND	Ground
23	D3P	MIPI data input.
24	D3N	MIPI data input.
25	GND	Ground
26	NC	No Connection
27	RESET	Global reset signal 3.3V
28	LCD_ID	NC
29	VDDIO	Power SUPPLY 3.3V
30	VDD	Power SUPPLY 3.3V
31	VDD	Power SUPPLY 3.3V

4. Electrical Characteristics

4.1 TFT LCD Module Operating Conditions

Item	Symbol	Min	Type	Max	Unit	Note
Supply Voltage	VDD	-	3.3	-	V	
	VSP	-	5.5	-	V	
	VS _N	-	-5.5	-	V	
	VGH	12	-	17	V	
	VGL	-16	-	-7	V	
VCOM	VCOM	-2	0	-		
Input signal voltage	V _{IH}	0.7V _{CC}	-	V _{CC}	V	
	V _{IL}	0	-	0.3V _{CC}	V	

4.2 Environment Absolute Rating


Item	Symbol	Min	Max	Unit	Note
Operation temperature	TOPR	-20	60	°C	
Storage temperature	TSTG	-30	70	°C	

4.3 LED back light specification (per a chip)


Item	Symbol	Condition	Min	Type	Max	Unit
Forward voltage	V _{led}	If=20mA /1-chip	-	9.6	-	V
Forward current	I _{led}		-	200	-	ma
PWM Signal Voltage	PWM _h	-	2.0	3.3	3.6	V
PWM Signal Voltage	PWM _l	-	0	-	0.5	V
Output PWM frequency	PWM _f	-		200	1k	Hz
LED enable high Voltage	EN _h	-	2.6	3.3	3.6	V
LED enable low Voltage	EN _l	-	0	-	0.4	V
Luminance color	white					

5. Power、Signal Sequence

Power ON

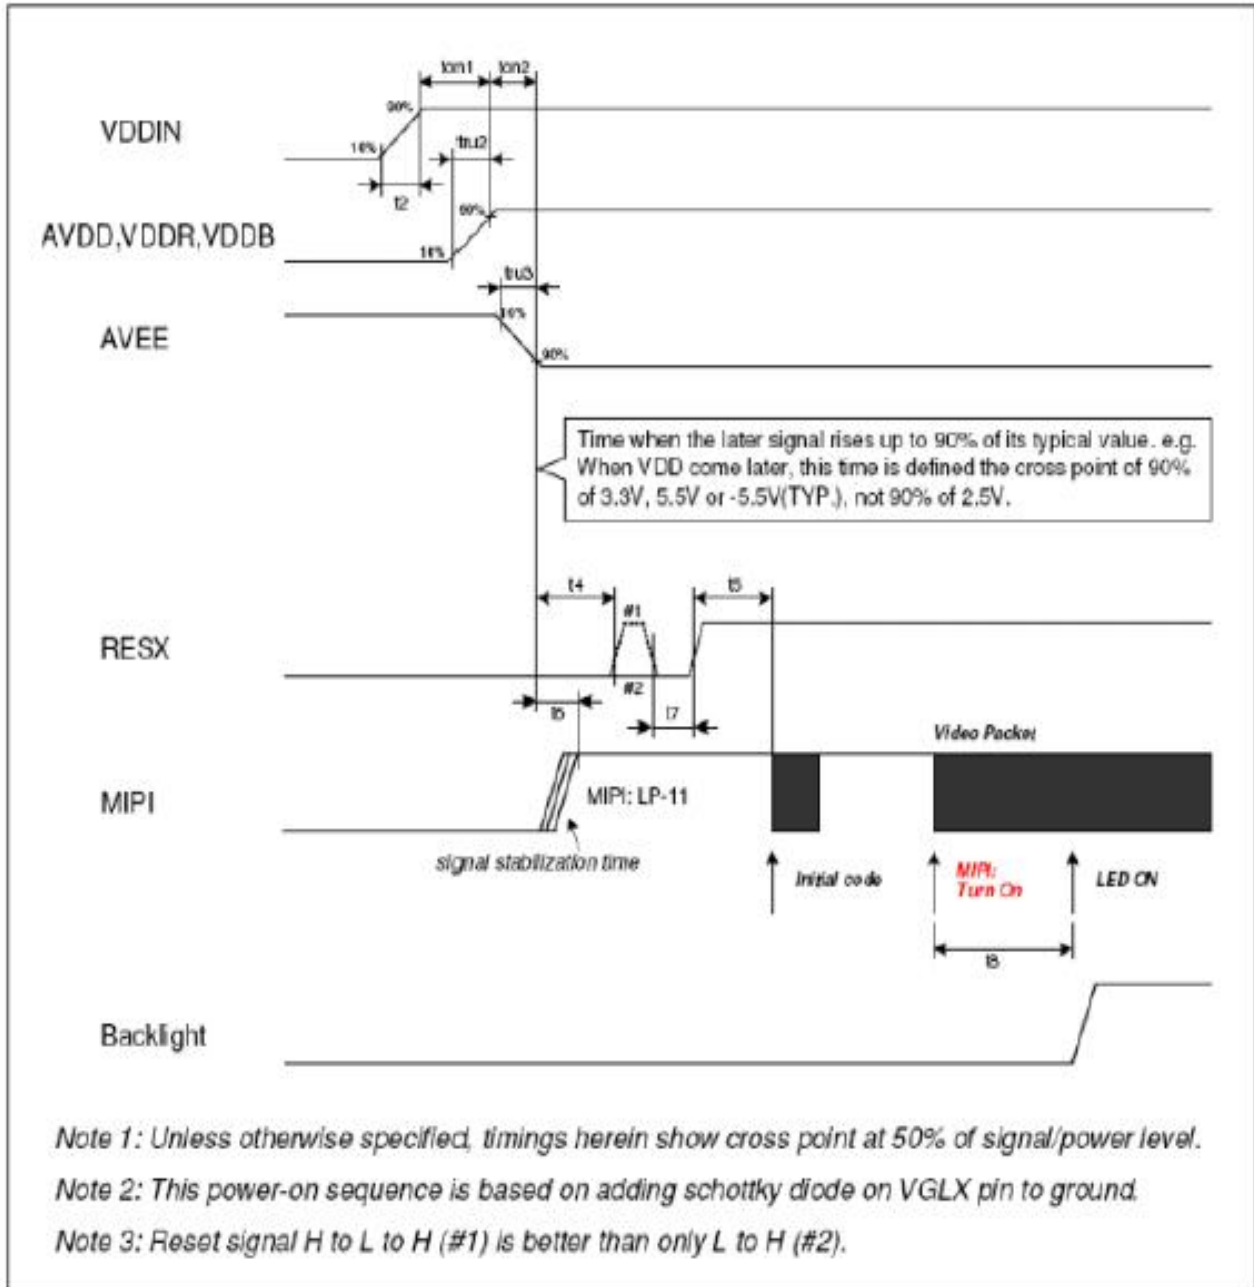


Power OFF

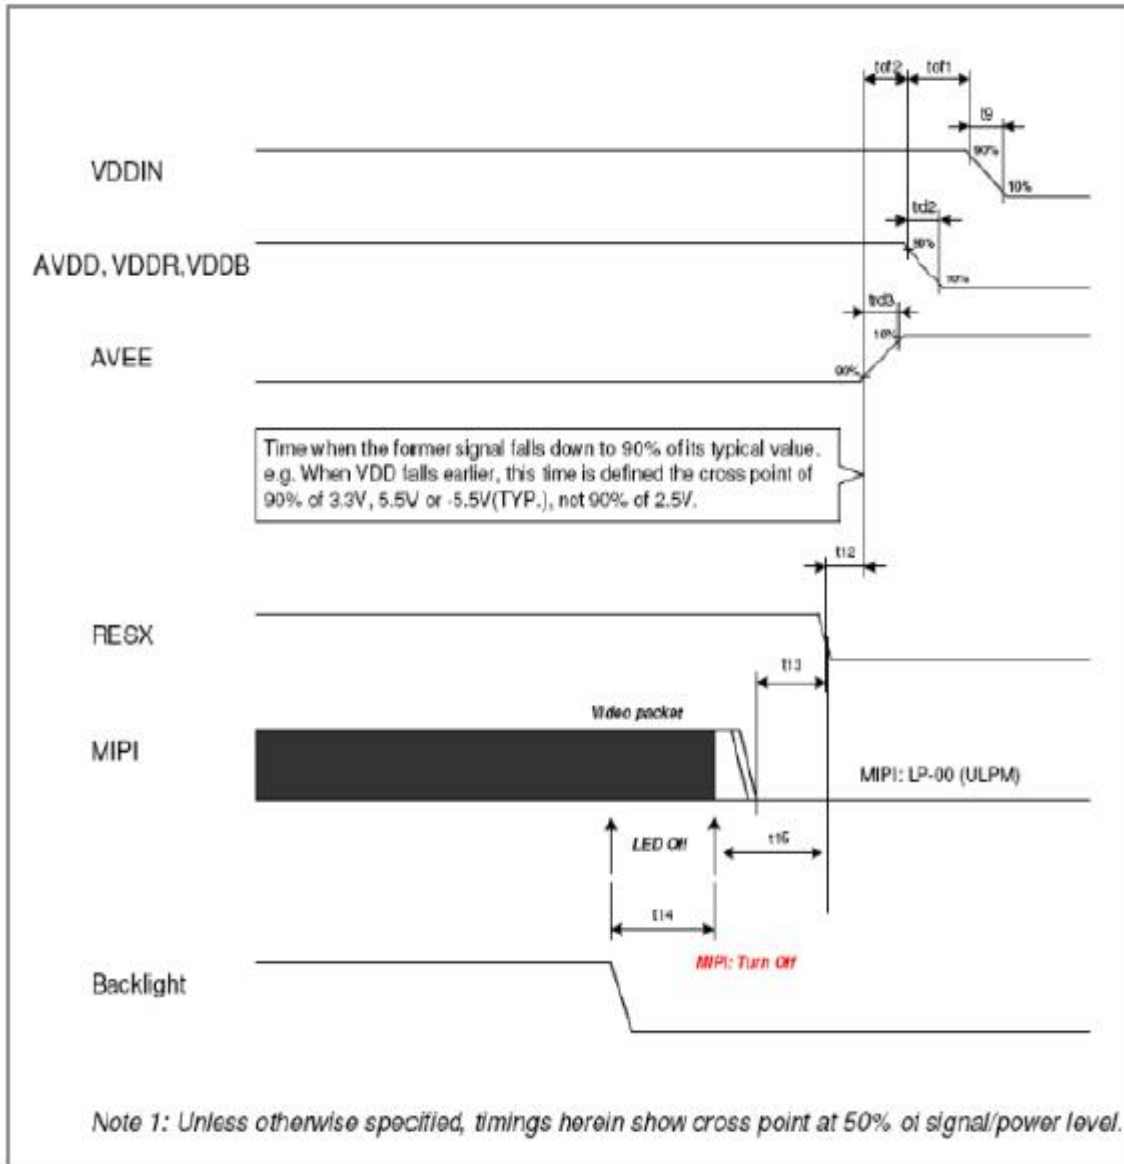

5.Optical Characteristics


Item		Symbol	Min	Typ	Max	Unit	Note
Contrast Ratio		CR	700	800	-		Note1 Note3
Luminance(center)		L	360	400	-	cd/m2	Note1 Note5 Note7
Luminous Uniformity(9 Point)		LU	75	-		%	Note7
Response Time		Rising+ Falling	-	30	40	ms	Note1 Note4
Viewing Angle K=Contrast Ratio>10	horizontal	θR	80	85	-	degree	Note2
		θL	80	85	-		
	vertical	θU	80	85	-		
		θD	80	85	-		
Color Chromaticity (CIE1931)	Red	X	TYP- 0.03	TBD	Typ+ 0.03	-	Note1 Note5 Note7
		Y		TBD			
	Green	X		TBD			
		Y		TBD			
	Blue	X		TBD			
		Y		TBD			
	White	X		0.295			
		Y		0.365			
Color gamut (NTSC ratio)		-	-	55		%	

Note1: Definition of optical measurement system (BM-7)

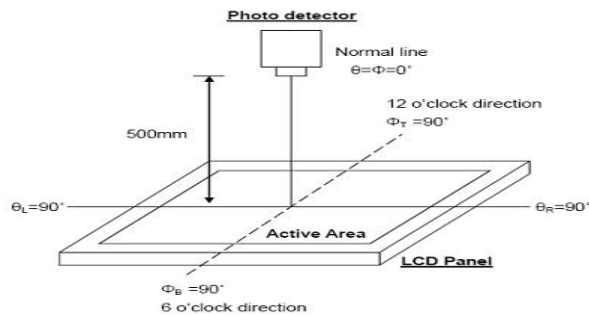

Note2: Definition of viewing angle range and measurement system

Viewing angle is measured at the center point of the LCD by CONOSCOPE (ergo-80).

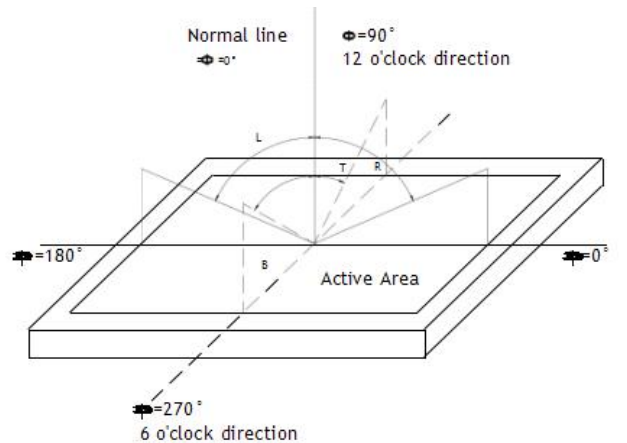

Note3: Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (T_{ON}) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_{OFF}) is the time between photo detector output intensity changed from 10% to 90%.

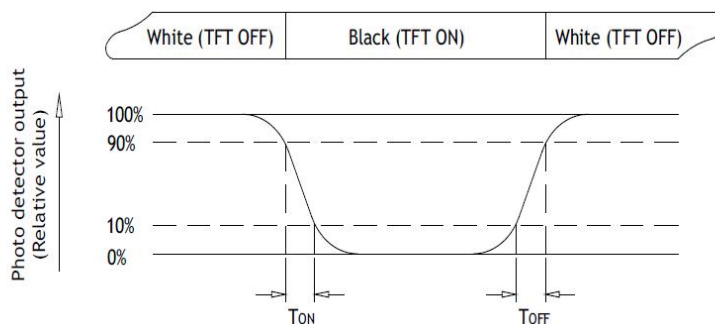


Fig. 6-3 Definition of response time

Note4: Definition of contrast ratio

$$\text{Contrast ratio(CR)} = \frac{\text{Luminance measured when LCD on the Whitestate}}{\text{Luminance measured when LCD on the Blackstate}}$$

“White state “: The state is that the LCD should drive by V_{white} . “Black state”: The state is that the LCD should drive by V_{black} . V_{white} : To be determined V_{black} : To be determined.

Note5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.


Note6: All input terminals LCD panel must be ground while measuring the center area of the panel. The LED driving condition is $I_L = 60\text{mA}$

Note7: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas. Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (U) = $L_{\text{min}} / L_{\text{max}}$

L----Active area length, W---- Active area width

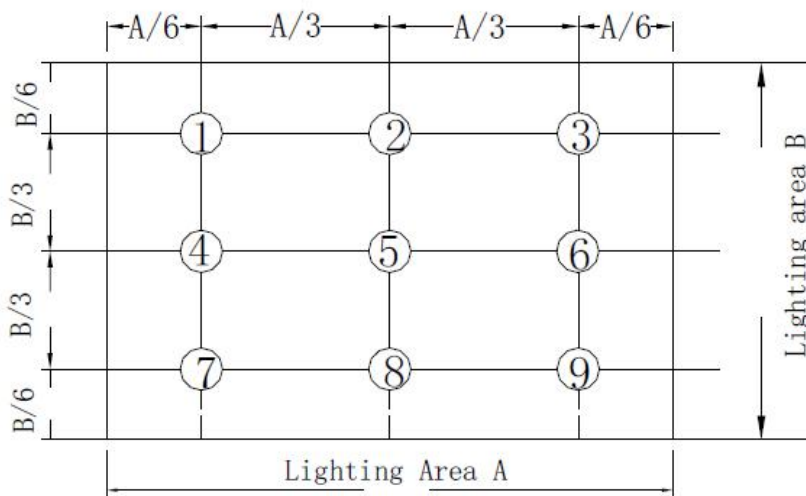

B_{max} : The measured maximum luminance of all measurement position.

B_{min} : The measured minimum luminance of all measurement position.


7. RELIABILITY TEST

7-1 Temperature and Humidity

TEST ITEMS	CONDITIONS	NOTE
High Temperature Operation	50°C ; 96hrs	
High Temperature Storage	60°C ; 96hrs	
High Temperature High Humidity Operation	40°C; 90%RH ; 96hrs (No condensation)	
Low Temperature Operation	-10°C ; 96hrs	
Low Temperature Storage	-20°C ; 96hrs	
Thermal Shock	-20°C (0.5hr) ~ 60°C (0.5hr) ; 10 Cycles	Non-Operating
Image Sticking	25°C ; 2hrs	1

Note 1: Condition of Image Sticking test: 25°C ±2°C

Operation with test pattern sustained for 4 hrs, then change to gray pattern immediately. After 5 mins, the mura must be disappeared completely .

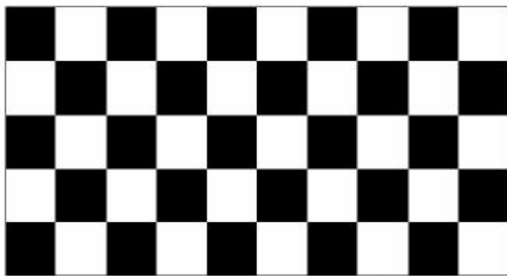

(a) Test Pattern (chess board Pattern)



(b) Gray Pattern

7-2 Shock and Vibration

ITEMS	CONDITIONS
Packing Shock (Non-Operation)	● Shock level:980m/s² ● Waveform:1/2 Sine wave,6msec ● ±X, ±Y ±Z,each axis 1 times
Packing Vibration (Non-Operation)	● Frequency range:8-33.3HZ ● Stoke:1.0mm ● Sweep: 10Hz-50Hz ● x,y,z 2 hours for each direction

7-3 Electrostatic Discharge

TEST ITEM	CONDITIONS
ESD (Non-operation)	150pF,330Ω, Contact±4KV,Air :±8KV.Note 1
	200pF,0Ω, ±200V Contact test.Note 2

Note:Measure Point:

- 1.LCD glass and metal bezel
- 2.IF connector pins

8. HANDLING PRECAUTION

- (1) Don't disassemble and reassemble the module by self.
- (2) Acid, alkali, alcohol or touched directly by hand will damage the display.
- (3) Static electricity will damage the module. Please configure grounding device.
- (4)The strong vibration, shock, twist or bend will cause material damage, even module broken.
- (5) It is easy to cause image sticking while displaying the same pattern for very long time.
- (6) The response time, brightness and performance will vary from different temperature.
- (7)12 months of the product term, the starry shipment date began to count.

- END -